



OWNER'S MANUAL

FAX-165

EN


Thank you for purchasing our car speakers.

Please read this instructions carefully before using and make sure you know speaker connections very well.

Precautions

- Before making holes, check the mounting space with supplied template.
- To prevent noise keep the wiring away from motors, high-voltage leads and other potential noise sources.
- To prevent a short-circuit, keep all wiring away from moving parts and sharp edges.
- Make sure you carefully read and understand the installation instructions before installing the system in vehicle.



Frequency Response/Impedance

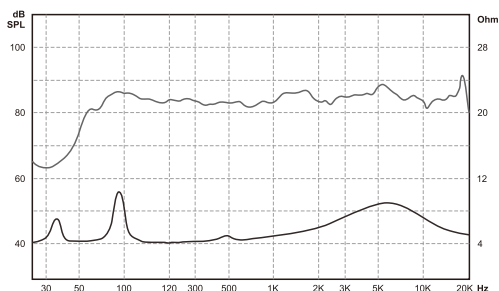

Product Specifications

- Type: 6.5" 2-Way Coaxial Speaker
- Max Power: 110 W
- Rms Power: 55 W
- Impedance: 4 Ohm
- Sensitivity(2.83V/1M): 88 dB
- Frequency Range: 64-18,000 Hz
- Woofer Frame: 6.5" Steel
- Woofer Cone: PP With Rubber Surround
- Tweeter Dome: Silk Dome
- Tweeter Voice Coil: 0.79" Wire Copper
- Tweeter Magnet: Neodymium

Product Dimensions



Connection Method

